



The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this document in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

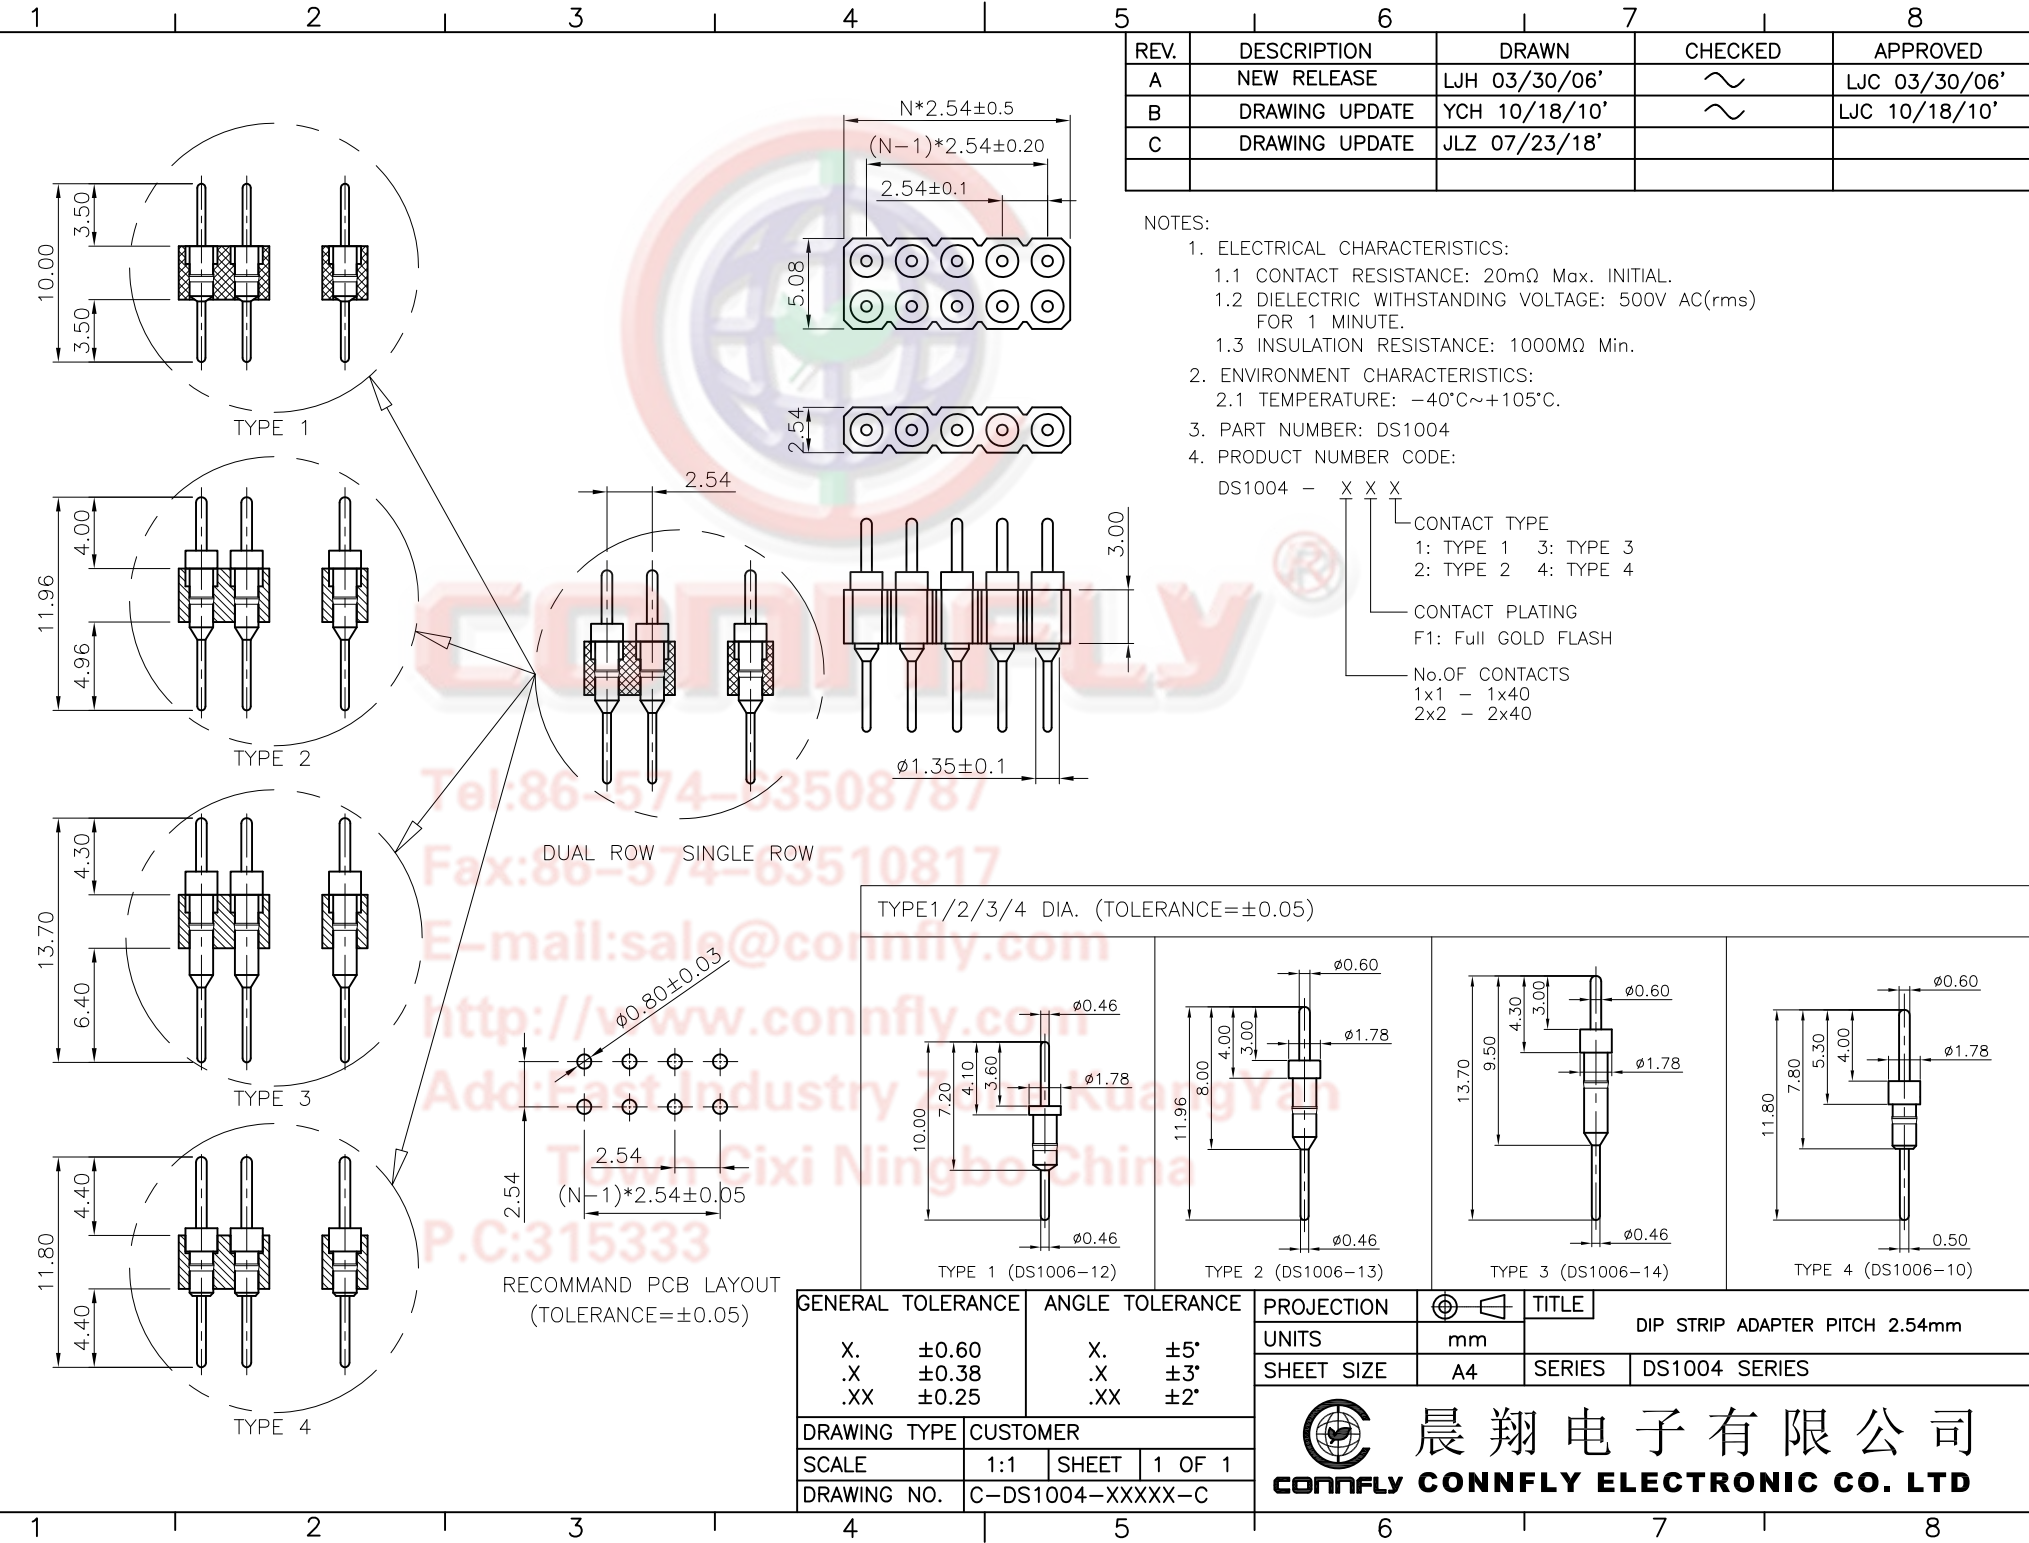

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/30/06'	~	LJC 03/30/06'
B	DRAWING UPDATE	YCH 10/18/10'	~	LJC 10/18/10'
C	DRAWING UPDATE	JLZ 07/23/18'		

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - TEMPERATURE: -40°C~+105°C.
  - PART NUMBER: DS1004
  - PRODUCT NUMBER CODE:  
DS1004 - X X X

CONTACT TYPE  
 1: TYPE 1    3: TYPE 3  
 2: TYPE 2    4: TYPE 4  
  
 CONTACT PLATING  
 F1: Full GOLD FLASH  
  
 No. OF CONTACTS  
 1x1 - 1x40  
 2x2 - 2x40

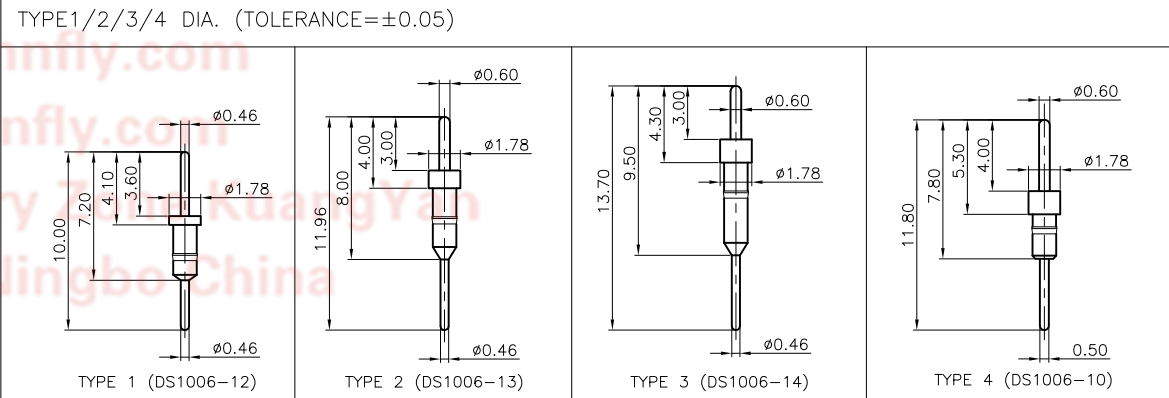

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	
X.	±0.60	X.	±5°		DIP STRIP ADAPTER PITCH 2.54mm	
.X	±0.38	.X	±3°	UNITS		mm
.XX	±0.25	.XX	±2°	SHEET SIZE		A4
DRAWING TYPE				CUSTOMER	SERIES	DS1004 SERIES
SCALE		1:1	SHEET	1 OF 1		
DRAWING NO.		C-DS1004-XXXXX-C				

**晨翔电子有限公司**  
**CONNFLY CONNELY ELECTRONIC CO. LTD**