
Dane aktualne na dzień: 14-03-2025 16:51

Link do produktu: <https://www.gotronik.pl/bateria-litowa-mini-energizer-cr2032-p-10402.html>




Bateria litowa mini ENERGIZER CR2032

Cena brutto	3,15 zł
Cena netto	2,56 zł
Czas wysyłki	24 godziny
Numer katalogowy	X-BAT0020
Kod EAN	7638900083040
Producent	Energizer

Opis produktu

Bateria litowa mini ENERGIZER CR2032

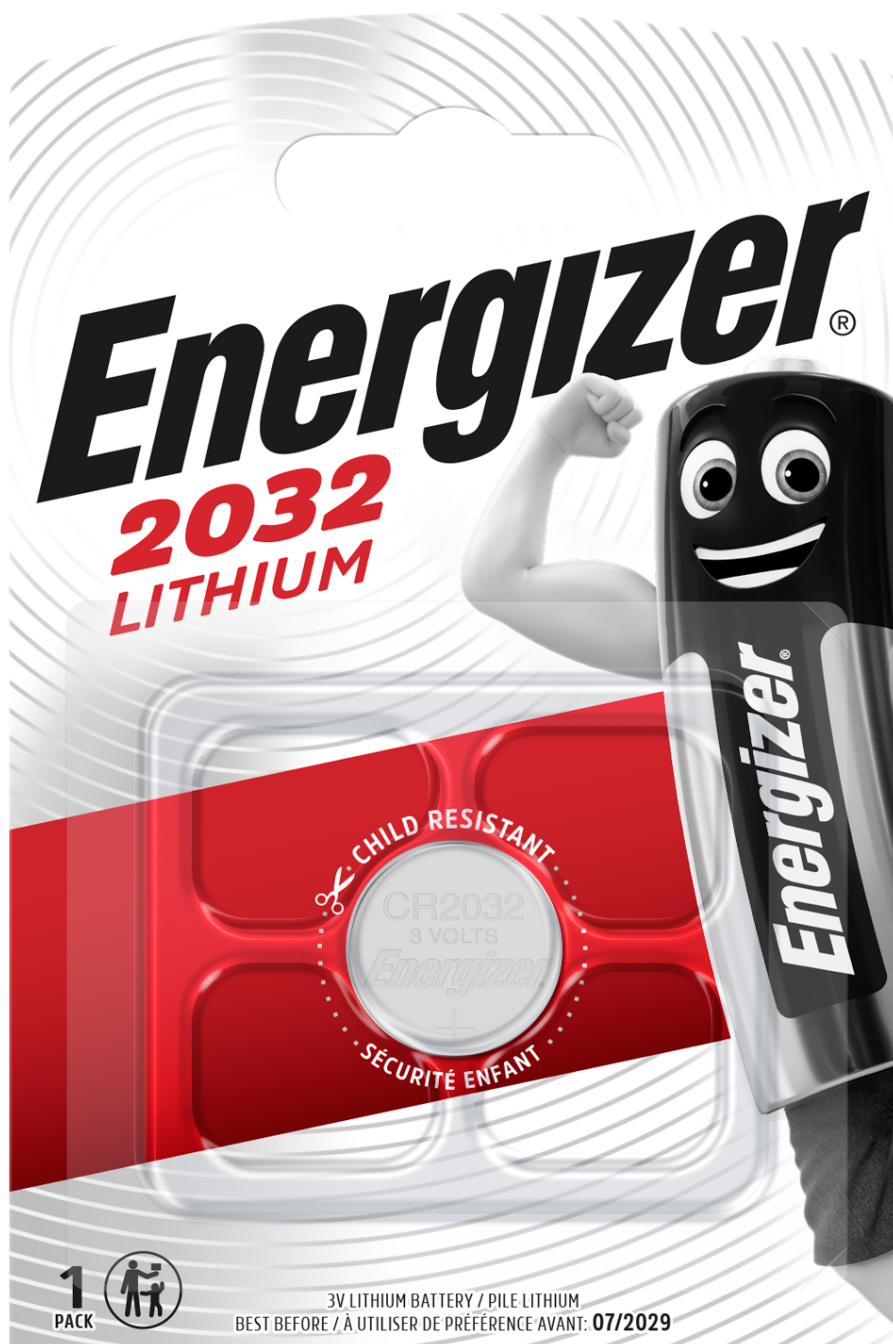


Ekstra energia dla wszystkich typów urządzeń!

ENERGIZER CR2032

Lithium Coin



Industry Standard Dimensions
mm (inches)

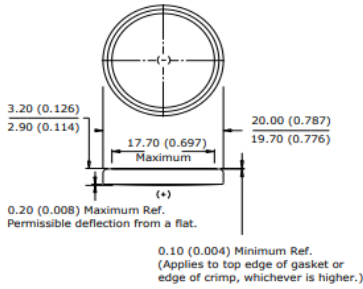

Specifications

Classification: "Lithium Coin"
Chemical System: Lithium / Manganese Dioxide (Li/MnO₂)
Designation: ANSI / NEDA-5004LC, IEC-CR2032
Nominal Voltage: 3.0 Volts
Typical Capacity: 235 mAh (to 2.0 volts)
 (Rated at 15K ohms at 21°C)
Typical Weight: 3.0 grams (0.10 oz.)
Typical Volume: 1.0 cubic centimeters (0.06 cubic inch)
Max Rev Charge: 1 microampere
Energy Density: 198 milliwatt hr/g, 653 milliwatt hr/cc
Typical Li Content: 0.109 grams (0.0038 oz.)
Operating Temp: -30C to 60C
Self Discharge: ~1% / year

Safety:



(1) KEEP OUT OF REACH OF CHILDREN. Swallowing may lead to serious injury or death in as little as 2 hours due to chemical burns and potential perforation of the esophagus. **Immediately see doctor; have doctor phone (800) 498-8666.**

(2) Battery compartment design. To prevent children from removing batteries, battery compartments should be designed with one of the following methods: a) a tool such as screwdriver or coin is required to open battery compartment or b) the battery compartment door/cover requires the application of a minimum of two independent and simultaneous movements of the securing mechanism to open by hand. Screws should remain captive with the battery door or cover.



Simulated Application test
Typical Performance at 21°C (70°F)

Schedule:	Typical Drains:	Load	Cutoff
	at 2.9V (mA)	(ohms)	(hours)
Continuous	0.19	15,000	1245

Pulse Discharge Characteristics
Pulse Test at 21°C (70°F)

Bkgnd Drain: Continuous
 21°C (70°F) 15K ohms
 0.19 mA @2.9V
Pulse Drain: 2 seconds X 12 times/day
 400 ohms
 ~6.8 mA @2.7V

Continuous Discharge Characteristics

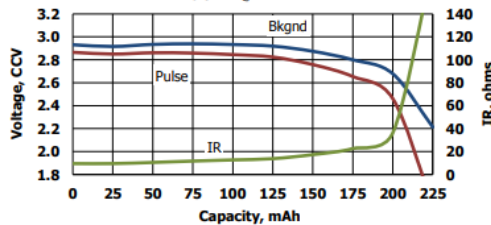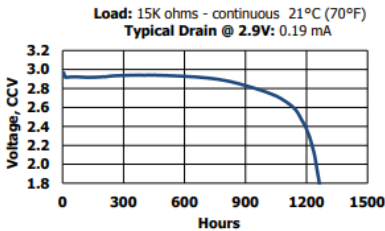

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication. Contents herein do not constitute a warranty and are for reference only.

Cechy produktu:

Model / kod producenta: 628753

Oznaczenie typu baterii: Bateria litowa

Ogólny typoszereg baterii guzikowej / pastylkowej [?]: CR2032 / DL2032 / E-CR2032 / ECR2032 / BR2032 / KCE2032 / LM2032 / SB-T51 / H2327376 / E2358808

Napięcie [V]: 3,00

Pojemność baterii [mAh]: 235

Średnica [mm]: 20

Wysokość [mm]: 3,2

Zawartość opakowania: Blister 1 sztuka